



Meltblown

The LFS meltblown filter cartridges are made of thermally bonded micro fibers that help create a strong filter that results in a more than average depth filtration. The cartridge is different from the traditional fabric filter materials. The fiber diameter averages from 5 – 25 μ and has an irregular and porous three dimensional stereoscopic structure, small micropore, large porosity (more than 75%), which effectively controls the filter precision. They are made of high quality FDA and EC approved polypropylene granulate.

The cartridges are true-graded to capture particles throughout the entire filter body, ensuring high dirt holding capacity and a long life.

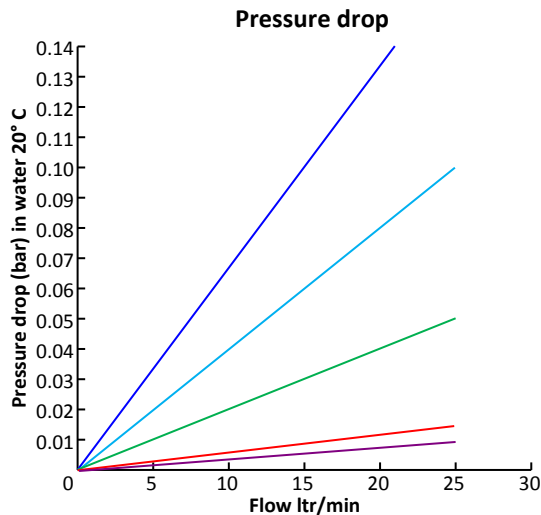

— 1 μ — 5 μ — 10 μ — 20 μ — 50 μ

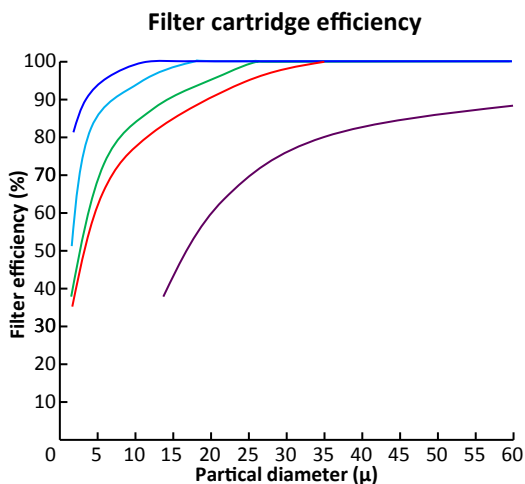

Specifications

Materials

Filter material	Polypropylene
-----------------	---------------

Dimensions

Outside diameter	60 to 110 mm
------------------	--------------

Inside diameter	28 or 38 mm
-----------------	-------------

Length	3" to 60"
--------	-----------

Other

Structure	3 layers
-----------	----------

Selectivity	0,5 to 150 μ
-------------	------------------

Connection	DOE C2, C3, C7, C8
------------	-----------------------

Max differential pressure	2,5 bar
---------------------------	---------

Max. Temperature	55°C
------------------	------

Flow rate @ 10" 10 μ	1 m ³ /hr
--------------------------	----------------------

For Clear Solutions